

MJE13003

SWITCHMODE™ Series NPN Silicon Power Transistor

These devices are designed for high-voltage, high-speed power switching inductive circuits where fall time is critical. They are particularly suited for 115 and 220 V SWITCHMODE applications such as Switching Regulators, Inverters, Motor Controls, Solenoid/Relay drivers and Deflection circuits.

Features

- Reverse Biased SOA with Inductive Loads @ $T_C = 100^\circ\text{C}$
- Inductive Switching Matrix 0.5 to 1.5 A, 25 and 100°C
 t_c @ 1 A, 100°C is 290 ns (Typ)
- 700 V Blocking Capability
- SOA and Switching Applications Information
- Pb-Free Package is Available*

MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---|-------------------|----------------|---------------------------|
| Collector-Emitter Voltage | $V_{CEO(sus)}$ | 400 | Vdc |
| Collector-Emitter Voltage | V_{CEV} | 700 | Vdc |
| Emitter Base Voltage | V_{EBO} | 9 | Vdc |
| Collector Current – Continuous – Peak (Note 1) | I_C I_{CM} | 1.5 3 | Adc |
| Base Current – Continuous – Peak (Note 1) | I_B I_{BM} | 0.75 1.5 | Adc |
| Emitter Current – Continuous – Peak (Note 1) | I_E I_{EM} | 2.25 4.5 | Adc |
| Total Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C | P_D | 1.4 11.2 | W mW/ $^\circ\text{C}$ |
| Total Power Dissipation @ $T_C = 25^\circ\text{C}$ Derate above 25°C | P_D | 40 320 | W mW/ $^\circ\text{C}$ |
| Operating and Storage Junction Temperature Range | T_J, T_{stg} | -65 to +150 | $^\circ\text{C}$ |

THERMAL CHARACTERISTICS

| Characteristic | Symbol | Max | Unit |
|--|-----------------|------|---------------------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 3.12 | $^\circ\text{C}/\text{W}$ |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 89 | $^\circ\text{C}/\text{W}$ |
| Maximum Load Temperature for Soldering Purposes: 1/8" from Case for 5 Seconds | T_L | 275 | $^\circ\text{C}$ |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

1. Pulse Test: Pulse Width = 5 ms, Duty Cycle $\leq 10\%$.


*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



ON Semiconductor®


<http://onsemi.com>

**1.5 AMPERES
NPN SILICON POWER
TRANSISTORS
300 AND 400 VOLTS
40 WATTS**



TO-225
CASE 77
STYLE 3

MARKING DIAGRAM



Y = Year
 WW = Work Week
 JE13003 = Device Code
 G = Pb-Free Package

ORDERING INFORMATION

| Device | Package | Shipping |
|-----------|---------------------|---------------|
| MJE13003 | TO-225 | 500 Units/Box |
| MJE13003G | TO-225 (Pb-Free) | 500 Units/Box |

MJE13003

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|----------------|--------|-----|-----|-----|------|
|----------------|--------|-----|-----|-----|------|

OFF CHARACTERISTICS (Note 2)

| | | | | | |
|--|----------------|--------|--------|--------|------|
| Collector–Emitter Sustaining Voltage ($I_C = 10\text{ mA}$, $I_B = 0$) | $V_{CEO(sus)}$ | 400 | – | – | Vdc |
| Collector Cutoff Current ($V_{CEV} = \text{Rated Value}$, $V_{BE(off)} = 1.5\text{ Vdc}$) ($V_{CEV} = \text{Rated Value}$, $V_{BE(off)} = 1.5\text{ Vdc}$, $T_C = 100^\circ\text{C}$) | I_{CEV} | – – | – – | 1 5 | mAdc |
| Emitter Cutoff Current ($V_{EB} = 9\text{ Vdc}$, $I_C = 0$) | I_{EBO} | – | – | 1 | mAdc |

SECOND BREAKDOWN

| | | | | | |
|---|-----------|---------------|--|--|---|
| Second Breakdown Collector Current with bass forward biased | $I_{S/b}$ | See Figure 11 | | | – |
| Clamped Inductive SOA with base reverse biased | RBSOA | See Figure 12 | | | – |

ON CHARACTERISTICS (Note 2)

| | | | | | |
|--|---------------|------------------|------------------|--------------------|-----|
| DC Current Gain ($I_C = 0.5\text{ Adc}$, $V_{CE} = 2\text{ Vdc}$) ($I_C = 1\text{ Adc}$, $V_{CE} = 2\text{ Vdc}$) | h_{FE} | 8 5 | – – | 40 25 | – |
| Collector–Emitter Saturation Voltage ($I_C = 0.5\text{ Adc}$, $I_B = 0.1\text{ Adc}$) ($I_C = 1\text{ Adc}$, $I_B = 0.25\text{ Adc}$) ($I_C = 1.5\text{ Adc}$, $I_B = 0.5\text{ Adc}$) ($I_C = 1\text{ Adc}$, $I_B = 0.25\text{ Adc}$, $T_C = 100^\circ\text{C}$) | $V_{CE(sat)}$ | – – – – | – – – – | 0.5 1 3 1 | Vdc |
| Base–Emitter Saturation Voltage ($I_C = 0.5\text{ Adc}$, $I_B = 0.1\text{ Adc}$) ($I_C = 1\text{ Adc}$, $I_B = 0.25\text{ Adc}$) ($I_C = 1\text{ Adc}$, $I_B = 0.25\text{ Adc}$, $T_C = 100^\circ\text{C}$) | $V_{BE(sat)}$ | – – – | – – – | 1 1.2 1.1 | Vdc |

DYNAMIC CHARACTERISTICS

| | | | | | |
|--|----------|---|----|---|-----|
| Current–Gain – Bandwidth Product ($I_C = 100\text{ mAdc}$, $V_{CE} = 10\text{ Vdc}$, $f = 1\text{ MHz}$) | f_T | 4 | 10 | – | MHz |
| Output Capacitance ($V_{CB} = 10\text{ Vdc}$, $I_E = 0$, $f = 0.1\text{ MHz}$) | C_{ob} | – | 21 | – | pF |

SWITCHING CHARACTERISTICS

| | | | | | | |
|--|--|----------|---|------|------|---------------|
| Resistive Load (Table 1) | | | | | | |
| Delay Time | $(V_{CC} = 125\text{ Vdc}$, $I_C = 1\text{ A}$, $I_{B1} = I_{B2} = 0.2\text{ A}$, $t_p = 25\text{ }\mu\text{s}$, Duty Cycle $\leq 1\%$) | t_d | – | 0.05 | 0.1 | μs |
| Rise Time | | t_r | – | 0.5 | 1 | μs |
| Storage Time | | t_s | – | 2 | 4 | μs |
| Fall Time | | t_f | – | 0.4 | 0.7 | μs |
| Inductive Load, Clamped (Table 1, Figure 13) | | | | | | |
| Storage Time | $(I_C = 1\text{ A}$, $V_{clamp} = 300\text{ Vdc}$, $I_{B1} = 0.2\text{ A}$, $V_{BE(off)} = 5\text{ Vdc}$, $T_C = 100^\circ\text{C}$) | t_{sv} | – | 1.7 | 4 | μs |
| Crossover Time | | t_c | – | 0.29 | 0.75 | μs |
| Fall Time | | t_{fi} | – | 0.15 | – | μs |

2. Pulse Test: $PW = 300\text{ }\mu\text{s}$, Duty Cycle $\leq 2\%$.

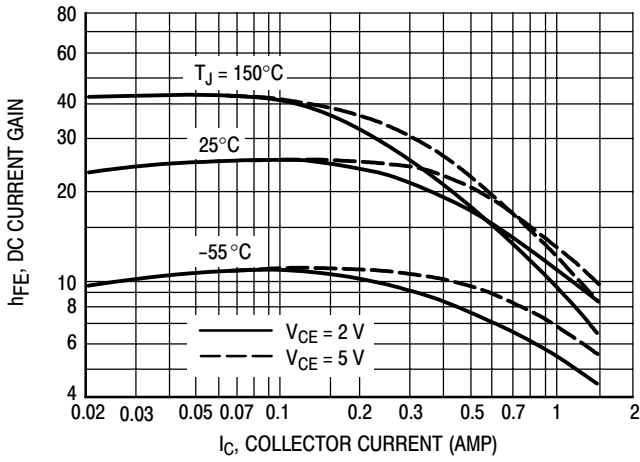


Figure 1. DC Current Gain

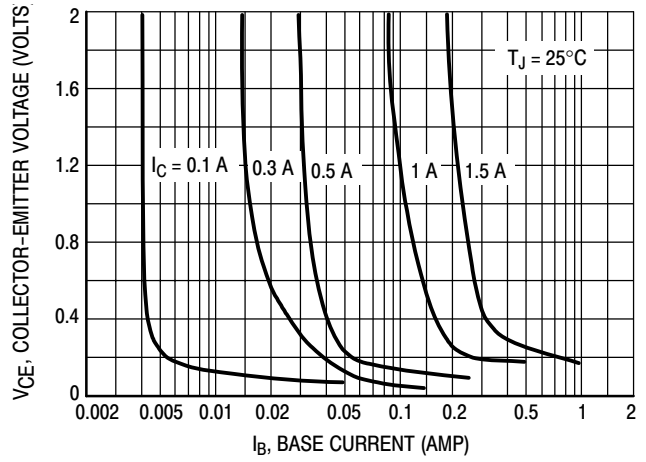


Figure 2. Collector Saturation Region

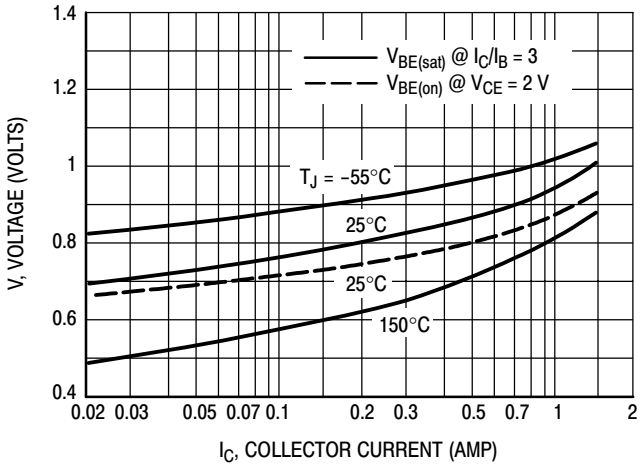


Figure 3. Base-Emitter Voltage

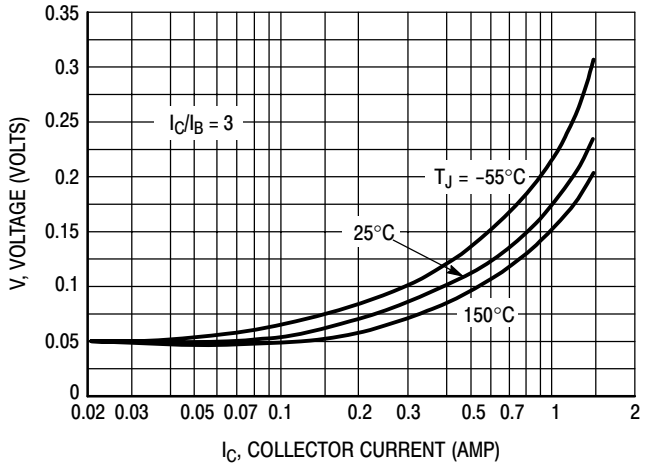


Figure 4. Collector-Emitter Saturation Region

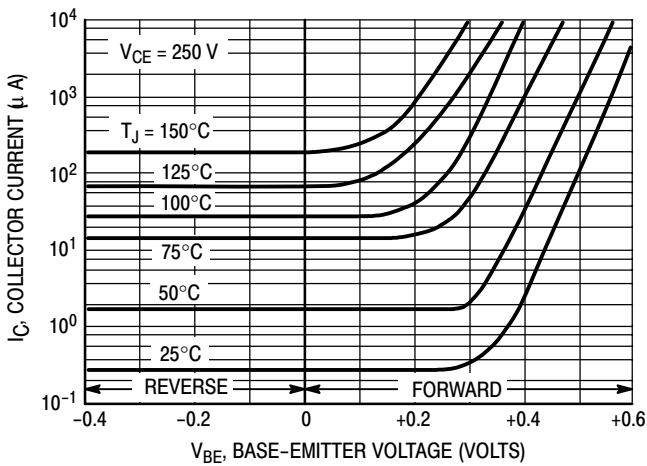


Figure 5. Collector Cutoff Region

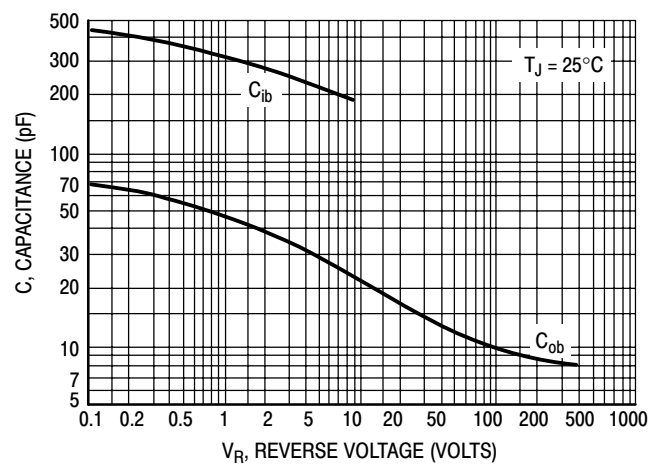


Figure 6. Capacitance

MJE13003

Table 1. Test Conditions for Dynamic Performance

| REVERSE BIAS SAFE OPERATING AREA AND INDUCTIVE SWITCHING | | RESISTIVE SWITCHING |
|--|---|--|
| TEST CIRCUITS | <p>DUTY CYCLE \leq 10% $t_r, t_f \leq$ 10 ns</p> <p>NOTE PW and V_{CC} Adjusted for Desired I_C R_B Adjusted for Desired I_{B1}</p> | |
| CIRCUIT VALUES | <p>Coil Data: Ferroxcube Core #6656 Full Bobbin (~200 Turns) #20</p> <p>GAP for 30 mH/2 A $L_{coil} = 50$ mH</p> <p>$V_{CC} = 20$ V $V_{clamp} = 300$ Vdc</p> | <p>$V_{CC} = 125$ V $R_C = 125 \Omega$ D1 = 1N5820 or Equiv. $R_B = 47 \Omega$</p> |
| TEST WAVEFORMS | <p>OUTPUT WAVEFORMS</p> <p>t_1 Adjusted to Obtain I_C</p> $t_1 \approx \frac{L_{coil} (I_{Cpk})}{V_{CC}}$ <p>Test Equipment Scope—Tektronics 475 or Equivalent</p> $t_2 \approx \frac{L_{coil} (I_{Cpk})}{V_{clamp}}$ | <p>$t_r, t_f <$ 10 ns Duty Cycle = 1.0% R_B and R_C adjusted for desired I_B and I_C</p> |

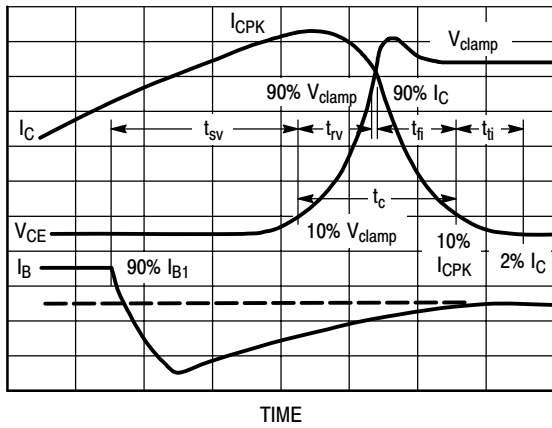


Figure 7. Inductive Switching Measurements

NOTE: All Data Recorded in the Inductive Switching Circuit in Table 1

Table 2. Typical Inductive Switching Performance

| I_C AMP | T_C °C | t_{sv} μS | t_{rv} μS | t_{fi} μS | t_{ti} μS | t_c μS |
|--------------|-------------|----------------|----------------|----------------|----------------|-------------|
| 0.5 | 25 | 1.3 | 0.23 | 0.30 | 0.35 | 0.30 |
| | 100 | 1.6 | 0.26 | 0.30 | 0.40 | 0.36 |
| 1 | 25 | 1.5 | 0.10 | 0.14 | 0.05 | 0.16 |
| | 100 | 1.7 | 0.13 | 0.26 | 0.06 | 0.29 |
| 1.5 | 25 | 1.8 | 0.07 | 0.10 | 0.05 | 0.16 |
| | 100 | 3 | 0.08 | 0.22 | 0.08 | 0.28 |

SWITCHING TIMES NOTE

In resistive switching circuits, rise, fall, and storage times have been defined and apply to both current and voltage waveforms since they are in phase. However, for inductive loads which are common to SWITCHMODE power supplies and hammer drivers, current and voltage waveforms are not in phase. Therefore, separate measurements must be made on each waveform to determine the total switching time. For this reason, the following new terms have been defined.

- t_{sv} = Voltage Storage Time, 90% I_{B1} to 10% V_{clamp}
- t_{rv} = Voltage Rise Time, 10–90% V_{clamp}
- t_{fi} = Current Fall Time, 90–10% I_C
- t_{ti} = Current Tail, 10–2% I_C
- t_c = Crossover Time, 10% V_{clamp} to 10% I_C

An enlarged portion of the inductive switching waveforms is shown in Figure 7 to aid in the visual identity of these terms.

For the designer, there is minimal switching loss during storage time and the predominant switching power losses occur during the crossover interval and can be obtained using the standard equation from AN-222:

$$P_{SWT} = 1/2 V_{CC}I_C(t_c)f$$

In general, $t_{rv} + t_{fi} \approx t_c$. However, at lower test currents this relationship may not be valid.

As is common with most switching transistors, resistive switching is specified at 25°C and has become a benchmark for designers. However, for designers of high frequency converter circuits, the user oriented specifications which make this a “SWITCHMODE” transistor are the inductive switching speeds (t_c and t_{sv}) which are guaranteed at 100°C.

RESISTIVE SWITCHING PERFORMANCE

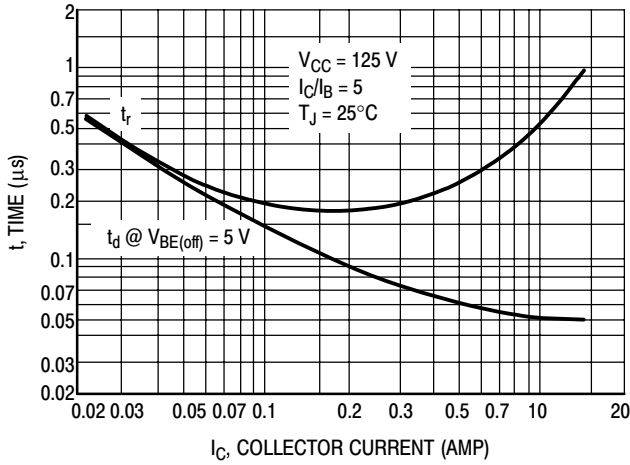


Figure 8. Turn-On Time

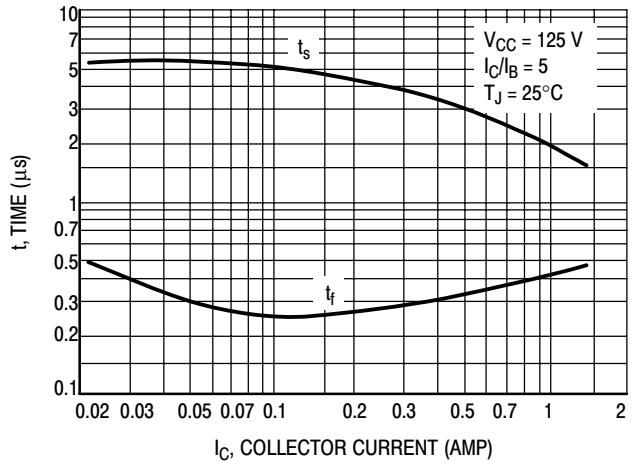


Figure 9. Turn-Off Time

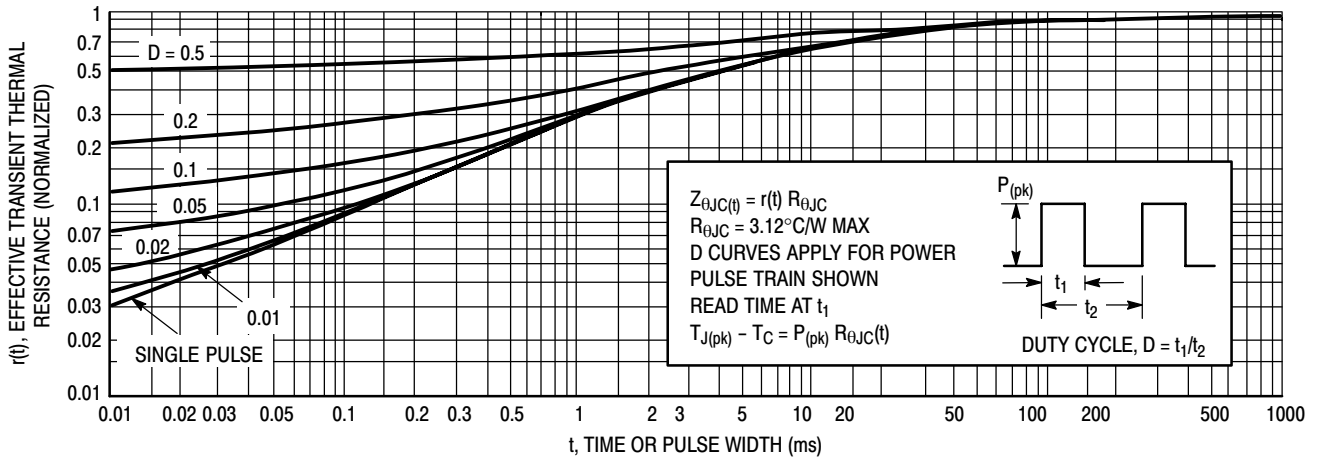


Figure 10. Thermal Response

The Safe Operating Area figures shown in Figures 11 and 12 are specified ratings for these devices under the test conditions shown.

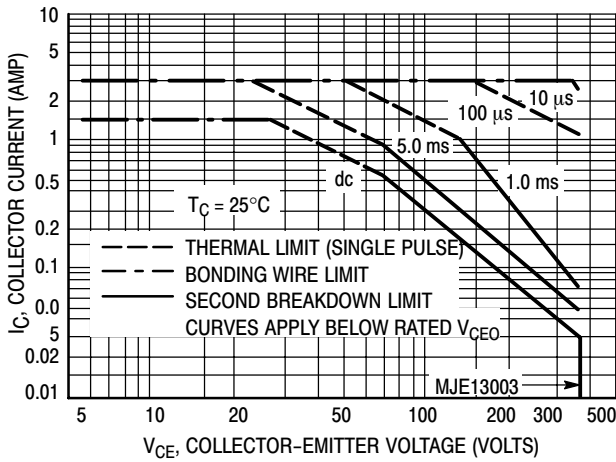


Figure 11. Active Region Safe Operating Area

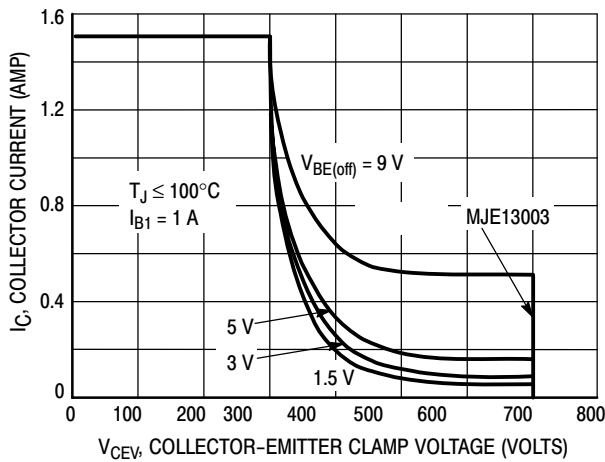


Figure 12. Reverse Bias Safe Operating Area

SAFE OPERATING AREA INFORMATION

FORWARD BIAS

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate $I_C - V_{CE}$ limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate.

The data of Figure 11 is based on $T_C = 25^\circ\text{C}$; $T_{J(pk)}$ is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when $T_C \geq 25^\circ\text{C}$. Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on Figure 11 may be found at any case temperature by using the appropriate curve on Figure 13.

$T_{J(pk)}$ may be calculated from the data in Figure 10. At high case temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by second breakdown.

REVERSE BIAS

For inductive loads, high voltage and high current must be sustained simultaneously during turn-off, in most cases, with the base to emitter junction reverse biased. Under these conditions the collector voltage must be held to a safe level at or below a specific value of collector current. This can be accomplished by several means such as active clamping, RC snubbing, load line shaping, etc. The safe level for these devices is specified as Reverse Bias Safe Operating Area and represents the voltage-current conditions during reverse biased turn-off. This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode. Figure 12 gives RBSOA characteristics.


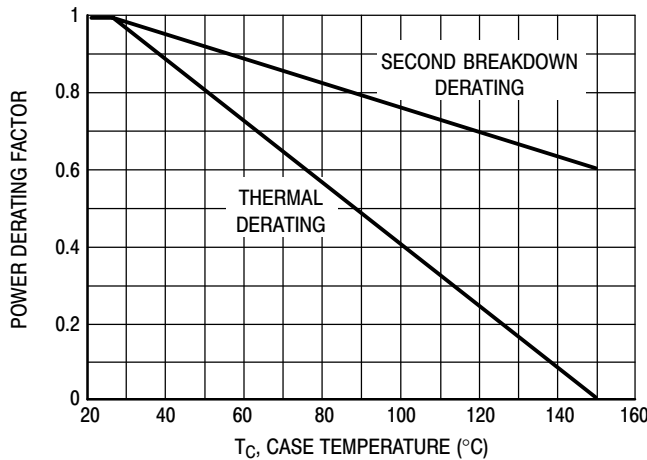


Figure 13. Forward Bias Power Derating

MJE13003

PACKAGE DIMENSIONS

TO-225
CASE 77-09
ISSUE Z

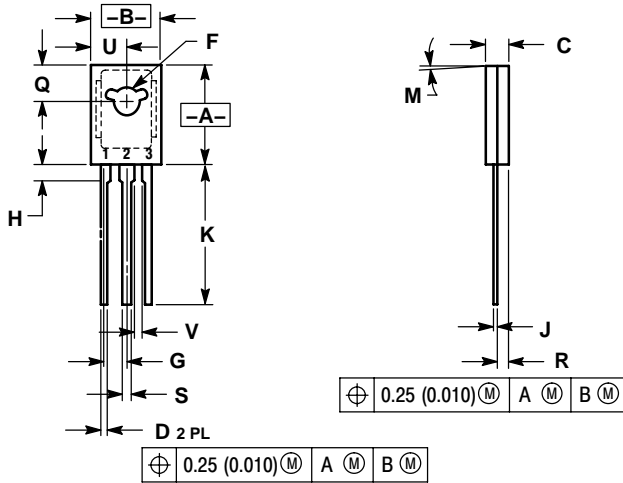

NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 077-01 THRU -08 OBSOLETE, NEW STANDARD 077-09.

| DIM | INCHES | | MILLIMETERS | |
|-----|-----------|-------|-------------|-------|
| | MIN | MAX | MIN | MAX |
| A | 0.425 | 0.435 | 10.80 | 11.04 |
| B | 0.295 | 0.305 | 7.50 | 7.74 |
| C | 0.095 | 0.105 | 2.42 | 2.66 |
| D | 0.020 | 0.026 | 0.51 | 0.66 |
| F | 0.115 | 0.130 | 2.93 | 3.30 |
| G | 0.094 BSC | | 2.39 BSC | |
| H | 0.050 | 0.095 | 1.27 | 2.41 |
| J | 0.015 | 0.025 | 0.39 | 0.63 |
| K | 0.575 | 0.655 | 14.61 | 16.63 |
| M | 5° TYP | | 5° TYP | |
| Q | 0.148 | 0.158 | 3.76 | 4.01 |
| R | 0.045 | 0.065 | 1.15 | 1.65 |
| S | 0.025 | 0.035 | 0.64 | 0.88 |
| U | 0.145 | 0.155 | 3.69 | 3.93 |
| V | 0.040 | --- | 1.02 | --- |

STYLE 3:

1. BASE
2. COLLECTOR
3. EMITTER

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082-1312 USA
Phone: 480-829-7710 or 800-344-3860 Toll Free USA/Canada
Fax: 480-829-7709 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051
Phone: 81-3-5773-3850

ON Semiconductor Website: <http://onsemi.com>

Order Literature: <http://www.onsemi.com/litorder>

For additional information, please contact your local Sales Representative.