




STANDARD

TEST LEADS

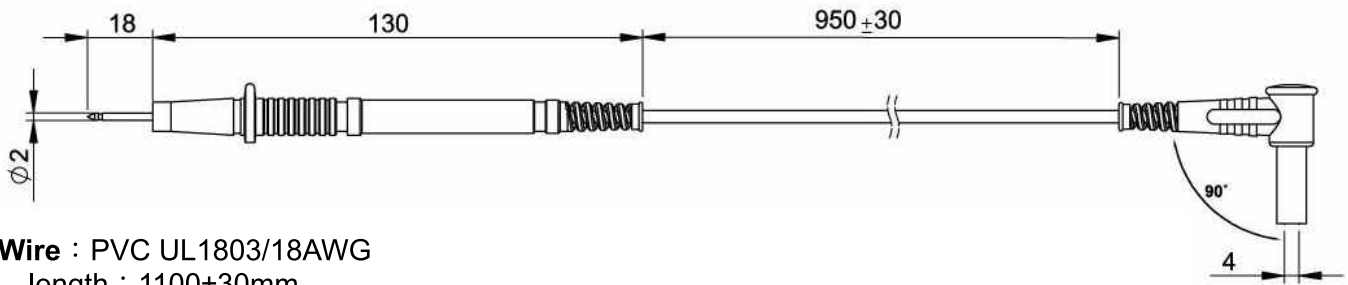

- **Wire** : PVC UL1803/18AWG
length : 1100±30mm
Out diameter : 3.5mm
Temperature tolerance range : -45°~105°
Braid copper wires : 64/0.12mm
- **Terminal** :
Right-angle 4mm brass (nickel plated) banana plug with caged and insulated sheathing to avoid the brass oxidation.
- **Probe tip** :
4mm (gold plated) : AL-24A (AL-24 without alligator clip)
4mm (nickel plated) : AL-25A (AL-25 without alligator clip)
2mm (gold plated) : AL-26
- **Rating** :
IEC/EN 61010-031 : 2002
CAT III 1000V 10A / CAT IV 600V 10A



AL-24A



AL-25A



AL-26