


XS3868 motherboard adapter plate Bluetooth stereo audio module

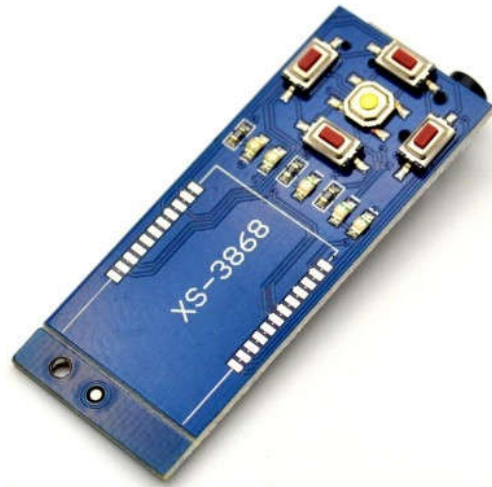

Features

- 1) high integration, low cost, low power consumption
- 2) comply with Bluetooth2.0 specification
- 3) Support A2DP V1.2, AVRCP V1.4 profiles
- 4) Integrated EEPROM, can be configured to work mode and parameters
- 5) stereo audio output can directly drive 40mW 32Ω speaker
- 6) Low voltage detection

2. Scope

- 1) Bluetooth stereo headphones
- 2) Bluetooth stereo

3. Parameter


- 1) .USB charging voltage: 4.2V ~ 9V
- 2) .USB charge current: 400ma
- 3) .XS-3868 power supply voltage: 3.6V ~ 4.2V
- 4) Play Music Current: 80MA (MAX)

5) With machine current: less than 1MA

6) Module size: 49 * 22mm (without welding XS-3868), 54.5 * 22mm (welding XS-3868)

4. Instructions

Meaning LED lights

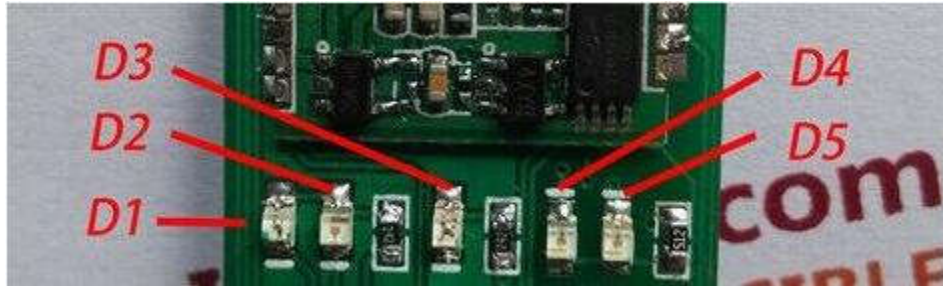

D1: Charging


D2: Charging complete

D3: Battery low

D4: LED1, Bluetooth status indication

D5: LED2, Bluetooth status indication

Key meanings:

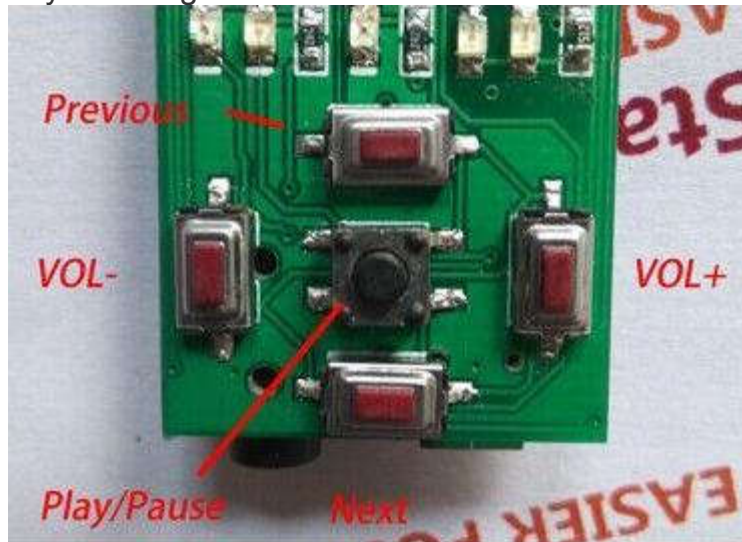

Previous: on a

Next: at a

VOL-: volume down

VOL +: volume increase

Play / Pause: Start / Pause, press switch

5. Notes

1). Next to the antenna can not have a metal

2). Sound shielding box can not be a large area